

Highlights

- Available in 1½", 1¾", and 2" models for use with APT™ brand XP double wall flexible pipe.
- A simple design including only five parts (nine parts for ducted applications) makes for an easy installation process.
- Can be installed with or without ducting.
- The interior ridges of the boot guide XP flexible pipe into place to assure a proper 90° entry into the containment sump.
- Suitable for use with flat and round sump surfaces.

Approvals


- ULC listed when installed with APT™ brand ULC listed sumps.

Rigid Entry Boot

APT™ brand rigid entry boots allow you to connect XP double wall flexible pipe to containment sumps with an unsurpassed level of installation ease, while also completely removing exposed rubber from the connection. This durable entry boot requires only a single 5" entry hole for installation, removing the time-consuming process of drilling multiple holes as well as the templates they require. An integrated clamp plate allows you to seal the boot in place on the sump wall simply by tightening it into place with a spanner wrench. As you tighten the clamp plate, the boot's gasketed face seal compresses into place, providing a watertight connection between the boot and the sump surface. The same method is used to seal the pipe into place simply by tightening the integrated compression nut. The interior pipe seal then compresses on to the pipe, providing another watertight connection between the boot and pipe.



Components

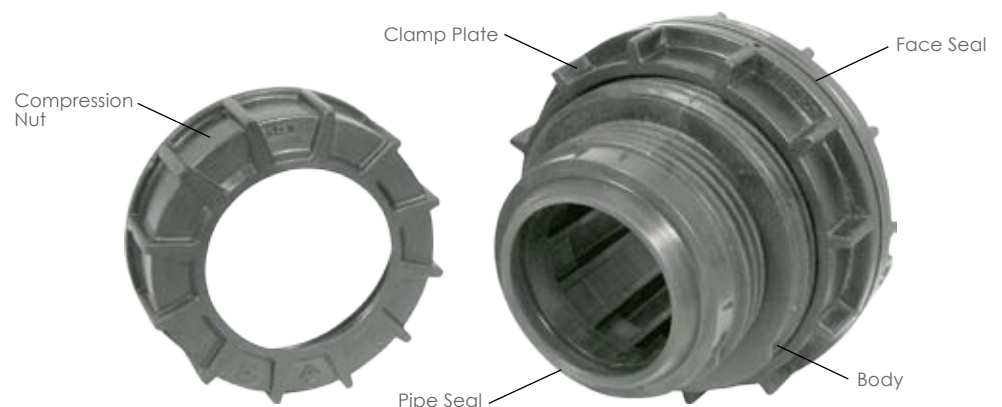

Specifications

- Body material: Glass-filled nylon
- Clamp plate and compression nut material: Glass-filled nylon
- Face seal and pipe seal material: Nitrile 1502
- Interior length once installed: 3¼"

Highlights

- Flexible ducting connectors are made from an oil and gasoline-resistant Nitrile rubber and employ stainless steel band clamps for maximum corrosion resistance.

Ducted Rigid Entry Boot

The ducted model of the APT™ brand rigid entry boot comes complete with flexible ducting connector and three clamps.



Ordering Information

Model	Description
REB-150-SC	1½" rigid entry boot for flat sump surfaces
RDEB-150-SC	1½" ducted rigid entry boot for flat sump surfaces
REB-R-150-SC	1½" rigid entry boot for round sump surfaces
RDEB-R-150-SC	1½" ducted rigid entry boot for round sump surfaces
REB-175-SC	1¾" rigid entry boot for flat sump surfaces
RDEB-175-SC	1¾" ducted rigid entry boot for flat sump surfaces
REB-R-175-SC	1¾" rigid entry boot for round sump surfaces
RDEB-R-175-SC	1¾" ducted rigid entry boot for round sump surfaces
REB-200-SC	2" rigid entry boot for flat sump surfaces
RDEB-200-SC	2" ducted rigid entry boot for flat sump surfaces
REB-R-200-SC	2" rigid entry boot for round sump surfaces
RDEB-R-200-SC	2" ducted rigid entry boot for round sump surfaces
408051001	1½" pipe seal
408052001	1¾" pipe seal
408042001	2" pipe seal
408055001	1½" pipe snap fit body insert
408056001	1¾" pipe snap fit body insert
408058001	1½" compression nut insert
408059001	1¾" compression nut insert

Note: Each size of rigid entry boot utilizes the same body allowing you to switch out the internal fitting components to fit different pipe sizes in the field if necessary. These fitting components include the pipe seal, pipe snap fit body insert and compression nut insert.

