

**Application**


For containment sump monitoring.

**Advantages**

- Utilizes proven magnetostrictive technology.
- Water warning, water alarm and product alarm.
- Tamper protection feature will alarm if sensor is moved from installed position.
- Will alarm and recover quickly when hydrocarbons are present.

# TSP-DMS Discriminating Magnetostrictive Sensor

The TSP-DMS is a fast acting discriminating sensor that utilizes magnetostrictive technology to provide reliable monitoring of dispenser pans and containment sumps. Its floats can detect the presence of water or hydrocarbons and also ensure that the sensor installation has not been tampered with. The TSP-DMS can report water warnings and programmable water alarm points as well as product alarms. The TSP-DMS is used with fuel management system consoles.

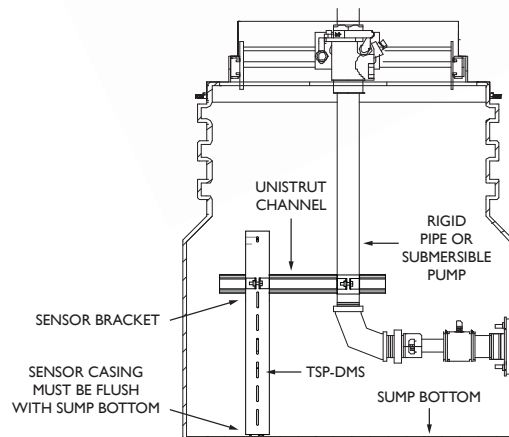

Model	Description
TSP-DMS-12	Discriminating magnetostrictive sensor, 12"
TSP-DMS-24	Discriminating magnetostrictive sensor, 24"
TSP-KS	Unistrut mounting kit

- Notes: 1. For use with the T5 Series fuel management systems.  
 2. This sensor communicates with the console via the TS-PRB probe module.  
 3. Requires Control Module software version 9.5 or greater.



**Franklin Fueling Systems**

www.franklinfueling.com  
 3760 Marsh Road • Madison, WI 53718, USA  
 Tel: +1 608 838 8786 • Fax: +1 608 838 6433  
 Tel: USA & Canada 1 800 225 9787 • Tel: Mexico 001 800 738 7610

