


## Advantages

- A time proven material, Nylon 12 has been the primary layer of APT pipe for more than 12 years. Preferred by the world's largest auto makers, the fuel line material contains no polyethylene.
- No possibility of piping layer delamination due to the layered piping construction of high-grade material.
- Biofuel approved (E85 and biodiesel).



## XP Pressure and Suction Product Piping

The 1" size of APT piping can be used in both pressure and suction applications, and is ideal for providing remote feed and fill for heaters, boilers and emergency generators. The 1½", 1¾" and 2" sizes of APT product piping can be used in both pressure and suction applications, and are ideal for underground service station fuel delivery systems. The D-Series piping is a single wall, direct bury piping, while the SC-Series piping provides additional environmental security as a secondary contained direct bury pipe. Both feature controlled flexibility, even in low temperatures, permitting fast, easy installation.

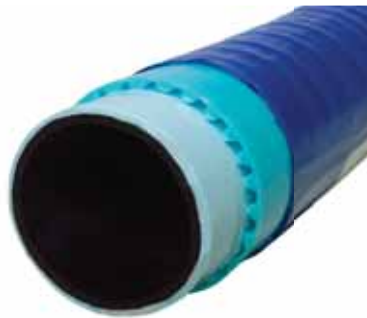


| Reel Size                 | Inches*        | cm*                   |
|---------------------------|----------------|-----------------------|
| Small standard            | 86 × 24 × 64½  | 213.3 × 60.9 × 163.8  |
| Standard (Std.)           | 86 × 42½ × 63½ | 218.4 × 107.9 × 161.2 |
| Large standard (Lg. Std.) | 86 × 52 × 63½  | 218.4 × 132.1 × 161.2 |
| Master                    | 91 × 33 × 74   | 231.1 × 83.8 × 187.9  |
| Super master (S. Mast.)   | 91 × 52 × 74   | 231.1 × 132.1 × 187.9 |

Notes: 1. Do not store piping in direct sunlight.  
2. UL971 listed to the January 2004 standards.


\*Reel dia. × width × hub dia.

| Model     | Description             | Ft.   | Reel     | Weight |     |
|-----------|-------------------------|-------|----------|--------|-----|
|           |                         |       |          | Lbs.   | Kg  |
| XP-100-SC | 1" secondary contained  | 250   | Small    | 486    | 219 |
|           |                         | 500   | Small    | 593    | 267 |
|           |                         | 2,500 | Std.     | 1,478  | 665 |
| XP-100-D  | 1" single wall          | 250   | Small    | 443    | 199 |
|           |                         | 500   | Small    | 505    | 227 |
|           |                         | 100   | Small    | 435    | 196 |
| XP-150-SC | 1½" secondary contained | 250   | Small    | 518    | 233 |
|           |                         | 500   | Small    | 655    | 295 |
|           |                         | 1,000 | Std.     | 965    | 434 |
|           |                         | 1,500 | Std.     | 1,240  | 558 |
|           |                         | 2,000 | Lg. Std. | 1,535  | 691 |
| XP-150-D  | 1½" single wall         | 100   | Small.   | 410    | 185 |
|           |                         | 250   | Small    | 455    | 205 |
|           |                         | 500   | Small    | 530    | 239 |
|           |                         | 1,000 | Std.     | 715    | 322 |
|           |                         | 1,500 | Std.     | 865    | 389 |
| XP-175-SC | 1¾" secondary contained | 250   | Small.   | 410    | 185 |
|           |                         | 500   | Small    | 455    | 205 |
|           |                         | 1,000 | Std.     | 530    | 239 |
|           |                         | 100   | Std.     | 485    | 218 |
|           |                         | 250   | Master   | 655    | 295 |
| XP-175-D  | 1¾" single wall         | 500   | Master   | 830    | 374 |
|           |                         | 1,000 | S. Mast. | 1,355  | 610 |
|           |                         | 100   | Std.     | 455    | 205 |
|           |                         | 250   | Master   | 580    | 261 |
|           |                         | 500   | Master   | 680    | 306 |
| XP-200-SC | 2" secondary contained  | 1,000 | S. Mast. | 1,115  | 502 |
|           |                         | 100   | Master   | 585    | 263 |
|           |                         | 200   | Master   | 690    | 311 |
|           |                         | 350   | Master   | 848    | 381 |
|           |                         | 700   | S. Mast. | 1,250  | 563 |
| XP-200-D  | 2" single wall          | 100   | Master   | 545    | 245 |
|           |                         | 200   | Master   | 610    | 275 |
|           |                         | 350   | Master   | 708    | 318 |
|           |                         | 700   | S. Mast. | 970    | 437 |

## XP Piping Construction

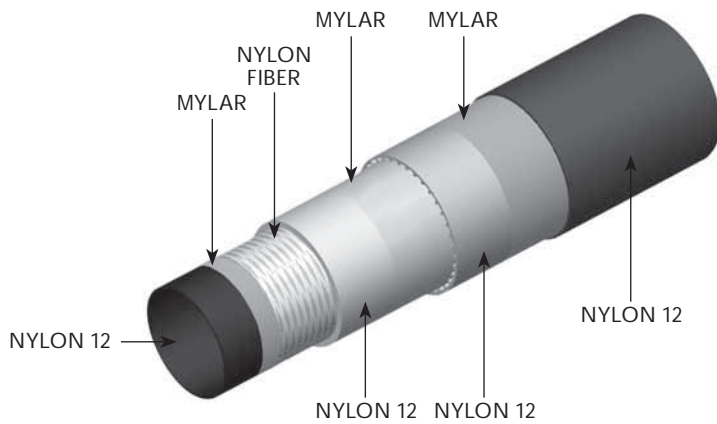

## XP Piping Dimensions

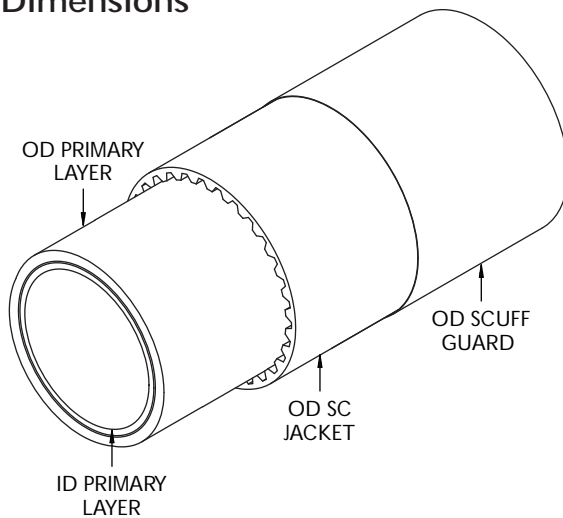

| Model     | ID ± 0.010 Primary Layer | OD ± 0.020 Primary Layer | OD ± 0.030 SC Jacket | OD ± 0.030 Scuff Guard | Minimum Bend Radius |
|-----------|--------------------------|--------------------------|----------------------|------------------------|---------------------|
| XP-100-D  | 1.00"                    | 1.27"                    | n/a                  | n/a                    | 36.00"              |
| XP-100-SC | 1.00"                    | 1.27"                    | 1.47"                | 1.502"                 | 36.00"              |
| XP-150-D  | 1.40"                    | 1.70"                    | n/a                  | n/a                    | 36.00"              |
| XP-150-SC | 1.40"                    | 1.70"                    | 1.90"                | 1.925"                 | 36.00"              |
| XP-175-D  | 1.65"                    | 1.95"                    | n/a                  | n/a                    | 36.00"              |
| XP-175-SC | 1.65"                    | 1.95"                    | 2.15"                | 2.175"                 | 36.00"              |
| XP-200-D  | 2.04"                    | 2.45"                    | n/a                  | n/a                    | 36.00"              |
| XP-200-SC | 2.04"                    | 2.45"                    | 2.65"                | 2.675"                 | 36.00"              |



www.franklinfueling.com  
 3760 Marsh Road • Madison, WI 53718, USA  
 Tel: +1 608 838 8786 • Fax: +1 608 838 6433  
 Tel: USA & Canada 1 800 225 9787 • Tel: Mexico 001 800 738 7610



Piping & Containment

