

# Manhole Ring Assembly


## D-Ring Gasket Installation

1. Before installing a new gasket, be sure any previous gasket material or debris is cleared from the gasket channel.
2. Check that the replacement gasket is the correct size.
3. Spray 3M Adhesive (or equivalent) into the gasket channel on the top side of the skirt's metal ring.



**Figure 1: Spray Adhesive**

4. Put the D-Ring gasket into the channel. Make sure the flat side is down (Figure 2).

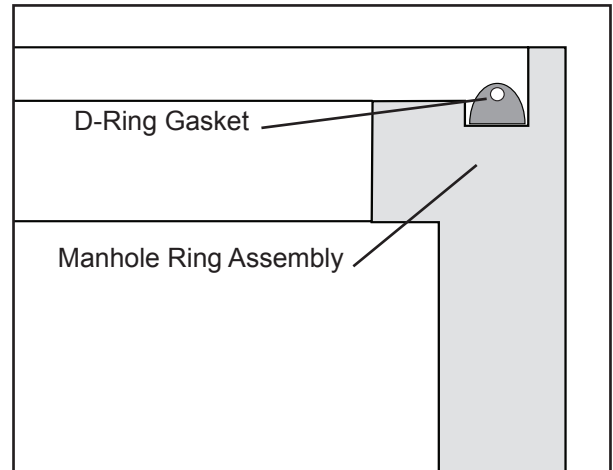

**Figure 2: Gasket Orientation**



**PHIL-TITE**  
**Franklin Fueling Systems**

3760 Marsh Road  
Madison, WI 53718, U.S.A.  
Tel: +1 608 838 8786  
Tel: USA & Canada 1 800 225 9787  
Tel: Mexico 001 800 738 7610  
[www.franklinfueling.com](http://www.franklinfueling.com)